

PREMIUM MOTORS POWERED BY SW SUN CONTROL

XQ5 MZ 35Nm 434MHz

ELECTRONIC ENCODED TUBULAR MOTORS WITH BUILT-IN RADIO RECEIVER



- For indoor/outdoor use
- Easy and accurate limit setting via remote
- Power cut and reprogramming from remote control
- Overload cut-off if torque exceeds when raising the shutter
- Power cut and reprogramming from remote control
- Compatible with all the ranges of SW Sun Control Remotes
- Compatible with SW Sun Control climate sensors

MAIN FEATURES


| | |
|-----------------------|-----------------------|
| Frequency | 60 Hz |
| Power Supply | 120 V |
| Standard Cable Length | 8 ft |
| Cable | 3 Conductors |
| Duty Rating | 45 sec On / 1 min Off |

TECHNICAL DETAILS

| | |
|------------------------|------|
| Torque (NM) | 35 |
| Speed (rpm) | 21 |
| Absorption (A) | 1.60 |
| Limit Switch Max Turns | 28 |

DIMENSIONS

| | |
|--------------------|-------|
| Segment A (inches) | 24.33 |
| Segment B (inches) | .708 |
| Segment C (inches) | 1.338 |

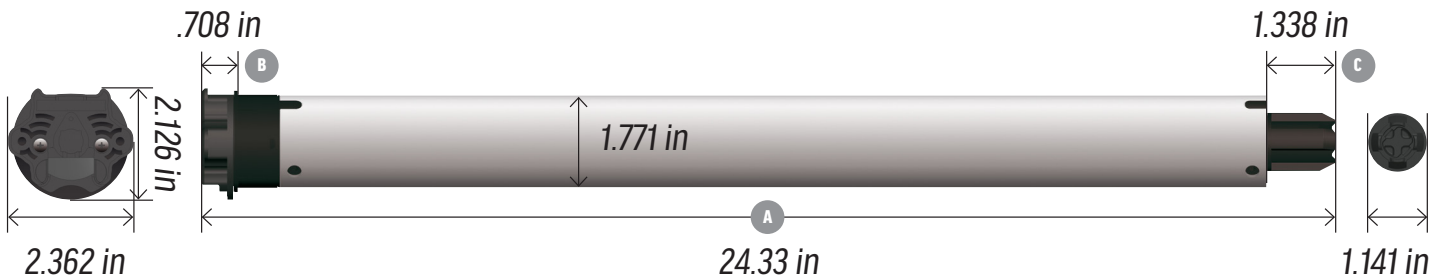

PROGRAM TO REMOTE



- Press and hold white button until the motor begins to run up or down, take note of which way the motor runs (up or down)
- Release button and within 3 seconds.
- Push the up or down arrow on the remote depending which way the motor ran in previous step
- Be sure to push the direction on the remote that corresponds with the direction the motor rotated
- You must have the channel selected that you want the shade being worked on selected

FACTORY RESET

- Press and hold the white button until the motor moves.

5 YEAR MOTOR WARRANTY